


Current Transducer CAS series

$I_{PN} = 6, 15, 25, 50 \text{ A}$

Ref: CAS 6-NP, CAS 15-NP, CAS 25-NP, CAS 50-NP

For the electronic measurement of current: DC, AC, pulsed..., with galvanic separation between the primary and the secondary circuit.



Features

- Closed loop (compensated) multi-range current transducer
- Voltage output
- Single supply
- Insulating plastic case material recognized according to UL 94-V0
- Compact design for PCB mounting.

Advantages

- Very low temperature coefficient of offset
- Very good dv/dt immunity
- LTS compatible footprint
- Reduced height.

Applications

- AC variable speed and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Standards

- EN 50178: 1997
- UL 508: 2013
- IEC 61010-1: 2010.

Application Domain

- Industrial.

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

Absolute maximum ratings

Parameter	Symbol	Unit	Value
Maximum supply voltage	$U_{C \max}$	V	7
Maximum primary conductor temperature	$T_{B \max}$	°C	110
Maximum primary current	$I_{P \max}$	A	$20 \times I_{P N}$
Electrostatic discharge voltage (HBM - Human Body Model)	$U_{ESD \text{ HBM}}$	kV	4

Stresses above these ratings may cause permanent damage. Exposure to absolute maximum ratings for extended periods may degrade reliability.

UL 508: Ratings and assumptions of certification

File # E189713 Volume: 2 Section: 1

Standards

- CSA C22.2 NO. 14-10 INDUSTRIAL CONTROL EQUIPMENT - Edition 11 - Revision Date 2011/08/01
- UL 508 STANDARD FOR INDUSTRIAL CONTROL EQUIPMENT - Edition 17 - Revision Date 2013/10/16

Ratings

Parameter	Symbol	Unit	Value
Primary involved potential		V AC/DC	1000
Max surrounding air temperature	T_A	°C	105
Primary current	I_P	A	According to series primary currents
Secondary supply voltage	U_C	V DC	7
Output voltage	U_{out}	V	0 to 5

Conditions of acceptability

When installed in the end-use equipment, consideration shall be given to the following:

- 1 - *These devices must be mounted in a suitable end-use enclosure.*
- 4 - *CAS series intended to be mounted on the printed circuit wiring board of the end-use equipment (with a minimum CTI of 100).*
- 5 - *CAS series shall be used in a pollution degree 2.*
- 8 - *Low voltage circuits are intended to be powered by a circuit derived from an isolating source (such as transformer, optical isolator, limiting impedance or electro-mechanical relay) and having no direct connection back to the primary circuit (other than through the grounding means).*
- 11 - *CAS series: based on results of temperature tests, in the end-use application, a maximum of 100 °C cannot be exceeded at soldering joint between primary coil pin and soldering point (corrected to the appropriate evaluated max. surrounding air).*

Marking

Only those products bearing the UL or UR Mark should be considered to be Listed or Recognized and covered under UL's Follow-Up Service. Always look for the Mark on the product.

Insulation coordination

Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC insulation test, 50 Hz, 1 min	U_d	kV	4.2	
Impulse withstand voltage 1.2/50 μ s	U_{Ni}	kV	7.6	
Partial discharge RMS test voltage ($q_m < 10$ pC)	U_{PDt}	V	1000	
Clearance (pri. - sec.)	d_{Cl}	mm	7.7	Shortest internal distance through air
Creepage distance (pri. - sec.)	d_{Cp}	mm	7.7	Shortest internal path along device body
Creepage distance (pri. - sec.)	d_{Cp}	mm	6.3	When mounted on PCB with recommended layout
Case material	-	-	V0 according to UL 94	
Comparative tracking index	CTI	-	600	
Application example	-	-	300 V CAT III PD2	Reinforced isolation, non uniform field according to EN 50178, EN 61010
Application example	-	-	600 V CAT III PD2	Simple insulation, non uniform field according to EN 50178, EN 61010
According to UL 508: Primary potential involved in Volts RMS AC or DC	-	-	600	For use in a pollution degree 2 environment

Environmental and mechanical characteristics

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Ambient operating temperature	T_A	°C	-40		105	
Ambient storage temperature	$T_{A st}$	°C	-55		105	
Mass	m	g		9		
EN 50178, IEC 60950-1, IEC 61010-1, IEC 61326-1, UL 508						

Electrical data CAS 6-NP

At $T_A = 25\text{ °C}$, $U_C = +5\text{ V}$, $N_P = 1\text{ turn}$, $R_L = 10\text{ k}\Omega$, unless otherwise noted.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal RMS current	I_{PN}	A		6		
Primary current, measuring range	I_{PM}	A	-20		20	
Number of primary turns	N_P	-		1,2,3		
Supply voltage	U_C	V	4.75	5	5.25	
Current consumption	I_C	mA		$15 + \frac{I_P\text{ (mA)}}{N_S}$	$20 + \frac{I_P\text{ (mA)}}{N_S}$	$N_S = 1731\text{ turns}$
Output voltage	U_{out}	V	0.375		4.625	
Output voltage @ $I_P = 0\text{ A}$	U_{out}	V		2.5		
Electrical offset voltage	U_{OE}	mV	-10.4		10.4	100 % tested $U_{out} - 2.5\text{ V}$
Electrical offset current referred to primary	I_{OE}	A	-0.1		0.1	100 % tested
Temperature coefficient of U_{out} @ $I_P = 0\text{ A}$	TCU_{out}	ppm/K	-80	± 10	80	ppm/K of 2.5 V -40 °C ...105 °C
Nominal sensitivity	S_N	mV/A		104.2		625 mV / I_{PN}
Sensitivity error	ε_S	%	-0.7		0.7	100 % tested
Temperature coefficient of S	TCS	ppm/K	-40		40	-40 °C ...105 °C
Linearity error	ε_L	% of I_{PN}	-0.1		0.1	
Magnetic offset current (10 x I_{PN}) referred to primary	I_{OM}	A	-0.1		0.1	
Output noise current spectral density 100 Hz ... 100 kHz referred to primary	i_{no}	$\mu\text{A/Hz}^{1/2}$		36		$R_L = 1\text{ k}\Omega$
Peak-peak output ripple at oscillator frequency $f = 450\text{ kHz}$ (typ.)	-	mV		40	160	$R_L = 1\text{ k}\Omega$
Delay time to 10 % to the final output value for I_{PN} step	t_{D10}	μs			0.3	$R_L = 1\text{ k}\Omega$ $di/dt = 18\text{ A}/\mu\text{s}$
Delay time to 90 % to the final output value for I_{PN} step	t_{D90}	μs			0.3	$R_L = 1\text{ k}\Omega$ $di/dt = 18\text{ A}/\mu\text{s}$
Frequency bandwidth ($\pm 1\text{ dB}$)	BW	kHz	200			$R_L = 1\text{ k}\Omega$
Frequency bandwidth ($\pm 3\text{ dB}$)	BW	kHz	300			$R_L = 1\text{ k}\Omega$
Total error	ε_{tot}	% of I_{PN}	-2.5		2.5	
Total error @ $T_A = 85\text{ °C}$ (105 °C)	ε_{tot}	% of I_{PN}	-4.6 (-5.4)		4.6 (5.4)	
Error	ε	% of I_{PN}	-0.8		0.8	
Error @ $T_A = 85\text{ °C}$ (105 °C)	ε	% of I_{PN}	-3.0 (-3.7)		3.0 (3.7)	

Electrical data CAS 15-NP

At $T_A = 25\text{ °C}$, $U_C = +5\text{ V}$, $N_P = 1\text{ turn}$, $R_L = 10\text{ k}\Omega$, unless otherwise noted.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal RMS current	I_{PN}	A		15		
Primary current, measuring range	I_{PM}	A	-51		51	
Number of primary turns	N_P	-		1,2,3		
Supply voltage	U_C	V	4.75	5	5.25	
Current consumption	I_C	mA		$15 + \frac{I_P\text{ (mA)}}{N_S}$	$20 + \frac{I_P\text{ (mA)}}{N_S}$	$N_S = 1731\text{ turns}$
Output voltage	U_{out}	V	0.375		4.625	
Output voltage @ $I_P = 0\text{ A}$	U_{out}	V		2.5		
Electrical offset voltage	U_{OE}	mV	-7.1		7.1	100 % tested $U_{out} - 2.5\text{ V}$
Electrical offset current referred to primary	I_{OE}	A	-0.17		0.17	100 % tested
Temperature coefficient of U_{out} @ $I_P = 0\text{ A}$	TCU_{out}	ppm/K	-70	± 7.5	70	ppm/K of 2.5 V -40 °C ... 105 °C
Theoretical sensitivity	S_N	mV/A		41.67		$625\text{ mV} / I_{PN}$
Sensitivity error	ε_S	%	-0.7		0.7	100 % tested
Temperature coefficient of S	TCS	ppm/K	-40		40	-40 °C ... 105 °C
Linearity error	ε_L	% of I_{PN}	-0.1		0.1	
Magnetic offset current ($10 \times I_{PN}$) referred to primary	I_{OM}	A	-0.1		0.1	
Output noise current spectral density 100 Hz ... 100 kHz referred to primary	i_{no}	$\mu\text{A/Hz}^{1/2}$		90		$R_L = 1\text{ k}\Omega$
Peak-peak output ripple at oscillator frequency $f = 450\text{ kHz}$ (typ.)	-	mV		15	60	$R_L = 1\text{ k}\Omega$
Delay time to 10 % to the final output value for I_{PN} step	t_{D10}	μs			0.3	$R_L = 1\text{ k}\Omega$ $di/dt = 44\text{ A}/\mu\text{s}$
Delay time to 90 % to the final output value for I_{PN} step	t_{D90}	μs			0.3	$R_L = 1\text{ k}\Omega$ $di/dt = 44\text{ A}/\mu\text{s}$
Frequency bandwidth ($\pm 1\text{ dB}$)	BW	kHz	200			$R_L = 1\text{ k}\Omega$
Frequency bandwidth ($\pm 3\text{ dB}$)	BW	kHz	300			$R_L = 1\text{ k}\Omega$
Total error	ε_{tot}	% of I_{PN}	-1.9		1.9	
Total error @ $T_A = 85\text{ °C}$ (105 °C)	ε_{tot}	% of I_{PN}	-3.9 (-4.5)		3.9 (4.5)	
Error	ε	% of I_{PN}	-0.8		0.8	
Error @ $T_A = 85\text{ °C}$ (105 °C)	ε	% of I_{PN}	-2.7 (-3.4)		2.7 (3.4)	

Electrical data CAS 25-NP

At $T_A = 25\text{ °C}$, $U_C = +5\text{ V}$, $N_P = 1\text{ turn}$, $R_L = 10\text{ k}\Omega$, unless otherwise noted.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal RMS current	I_{PN}	A		25		
Primary current, measuring range	I_{PM}	A	-85		85	
Number of primary turns	N_P	-		1,2,3		
Supply voltage	U_C	V	4.75	5	5.25	
Current consumption	I_C	mA		$15 + \frac{I_P\text{ (mA)}}{N_S}$	$20 + \frac{I_P\text{ (mA)}}{N_S}$	$N_S = 1731\text{ turns}$
Output voltage	U_{out}	V	0.375		4.625	
Output voltage @ $I_P = 0\text{ A}$	U_{out}	V		2.5		
Electrical offset voltage	U_{OE}	mV	-6.25		6.25	100 % tested $U_{out} - 2.5\text{ V}$
Electrical offset current referred to primary	I_{OE}	A	-0.25		0.25	100 % tested
Temperature coefficient of U_{out} @ $I_P = 0\text{ A}$	TCU_{out}	ppm/K	-60	± 6.5	60	ppm/K of 2.5 V -40 °C ... 105 °C
Theoretical sensitivity	S_N	mV/A		25		625 mV / I_{PN}
Sensitivity error	ε_S	%	-0.7		0.7	100 % tested
Temperature coefficient of S	TCS	ppm/K	-40		40	-40 °C ... 105 °C
Linearity error	ε_L	% of I_{PN}	-0.1		0.1	
Magnetic offset current (10 x I_{PN}) referred to primary	I_{OM}	A	-0.1		0.1	
Output noise current spectral density 100 Hz ... 100 kHz referred to primary	i_{no}	$\mu\text{A/Hz}^{1/2}$		150		$R_L = 1\text{ k}\Omega$
Peak-peak output ripple at oscillator frequency $f = 450\text{ kHz}$ (typ.)	-	mV		10	40	$R_L = 1\text{ k}\Omega$
Delay time to 10 % to the final output value for I_{PN} step	t_{D10}	μs			0.3	$R_L = 1\text{ k}\Omega$ $di/dt = 68\text{ A}/\mu\text{s}$
Delay time to 90 % to the final output value for I_{PN} step	t_{D90}	μs			0.3	$R_L = 1\text{ k}\Omega$ $di/dt = 68\text{ A}/\mu\text{s}$
Frequency bandwidth ($\pm 1\text{ dB}$)	BW	kHz	200			$R_L = 1\text{ k}\Omega$
Frequency bandwidth ($\pm 3\text{ dB}$)	BW	kHz	300			$R_L = 1\text{ k}\Omega$
Total error	ε_{tot}	% of I_{PN}	-1.8		1.8	
Total error @ $T_A = 85\text{ °C}$ (105 °C)	ε_{tot}	% of I_{PN}	-3.5 (4.1)		3.5 (4.1)	
Error	ε	% of I_{PN}	-0.8		0.8	
Error @ $T_A = 85\text{ °C}$ (105 °C)	ε	% of I_{PN}	-2.5 (3.1)		2.5 (3.1)	

Electrical data CAS 50-NP

CAS series

At $T_A = 25\text{ °C}$, $U_C = +5\text{ V}$, $N_P = 1\text{ turn}$, $R_L = 10\text{ k}\Omega$, unless otherwise noted.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal RMS current	I_{PN}	A		50		
Primary current, measuring range	I_{PM}	A	-150		150	
Number of primary turns	N_P	-		1,2,3		
Supply voltage	U_C	V	4.75	5	5.25	
Current consumption	I_C	mA		$15 + \frac{I_P\text{ (mA)}}{N_S}$	$20 + \frac{I_P\text{ (mA)}}{N_S}$	$N_S = 966\text{ turns}$
Output voltage	U_{out}	V	0.375		4.625	
Output voltage @ $I_P = 0\text{ A}$	U_{out}	V		2.5		
Electrical offset voltage	U_{OE}	mV	-5.8		5.8	100 % tested $U_{out} - 2.5\text{ V}$
Electrical offset current referred to primary	I_{OE}	A	-0.46		0.46	100 % tested
Temperature coefficient of U_{out} @ $I_P = 0\text{ A}$	TCU_{out}	ppm/K	-60	± 6	60	ppm/K of 2.5 V -40 °C ... 105 °C
Theoretical sensitivity	S_N	mV/A		12.5		625 mV / I_{PN}
Sensitivity error	ε_S	%	-0.7		0.7	100 % tested
Temperature coefficient of S	TCS	ppm/K	-40		40	-40 °C ... 105 °C
Linearity error	ε_L	% of I_{PN}	-0.1		0.1	
Magnetic offset current ($10 \times I_{PN}$) referred to primary	I_{OM}	A	-0.1		0.1	
Output noise current spectral density 100 Hz ... 100 kHz referred to primary	i_{no}	$\mu\text{A/Hz}^{1/2}$		300		$R_L = 1\text{ k}\Omega$
Peak-peak output ripple at oscillator frequency $f = 450\text{ kHz}$ (typ.)	-	mV		5	20	$R_L = 1\text{ k}\Omega$
Delay time to 10 % to the final output value for I_{PN} step	t_{D10}	μs			0.3	$R_L = 1\text{ k}\Omega$ $di/dt = 18\text{ A}/\mu\text{s}$
Delay time to 90 % to the final output value for I_{PN} step	t_{D90}	μs			0.3	$R_L = 1\text{ k}\Omega$ $di/dt = 18\text{ A}/\mu\text{s}$
Frequency bandwidth ($\pm 1\text{ dB}$)	BW	kHz	200			$R_L = 1\text{ k}\Omega$
Frequency bandwidth ($\pm 3\text{ dB}$)	BW	kHz	300			$R_L = 1\text{ k}\Omega$
Total error	ε_{tot}	% of I_{PN}	-1.7		1.7	
Total error @ $T_A = 85\text{ °C}$ (105 °C)	ε_{tot}	% of I_{PN}	-3.4 (4.0)		3.4 (4.0)	
Error	ε	% of I_{PN}	-0.8		0.8	
Error @ $T_A = 85\text{ °C}$ (105 °C)	ε	% of I_{PN}	-2.5 (3.1)		2.5 (3.1)	

Typical performance characteristics CAS 6-NP

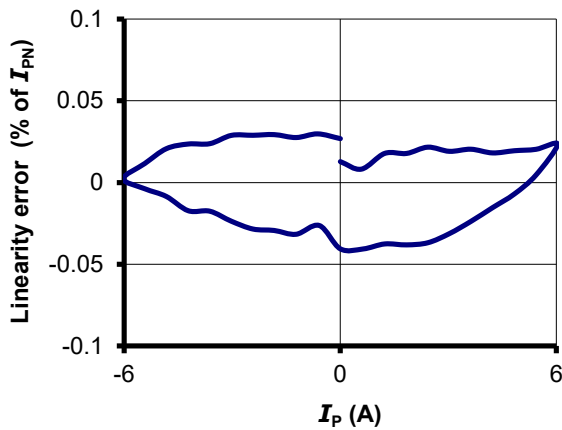


Figure 1: Linearity error

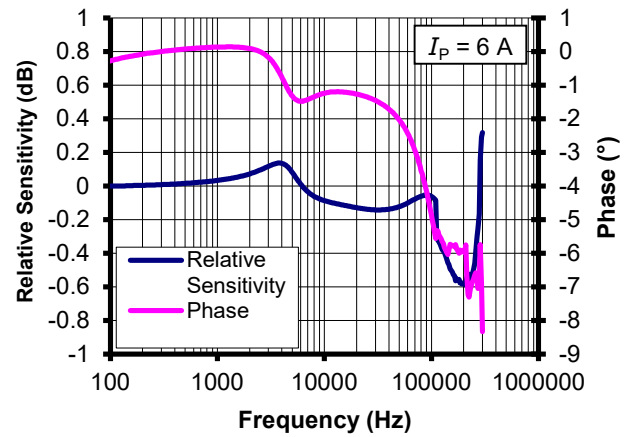


Figure 2: Frequency response

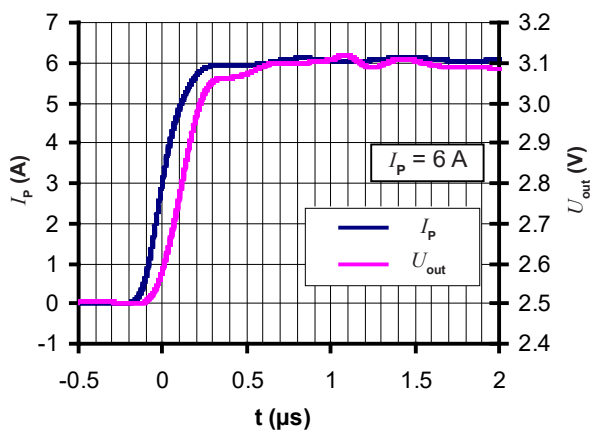


Figure 3: Step response

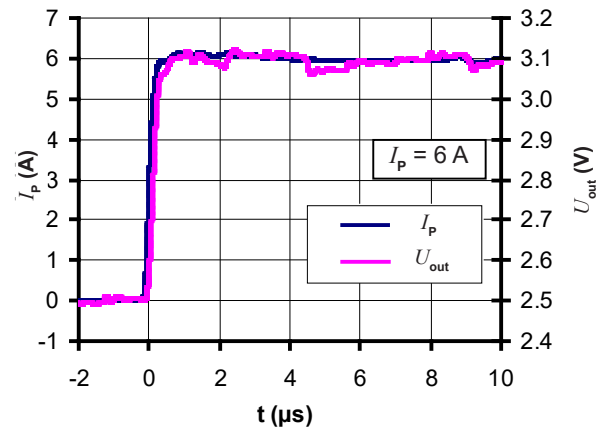


Figure 4: Step response

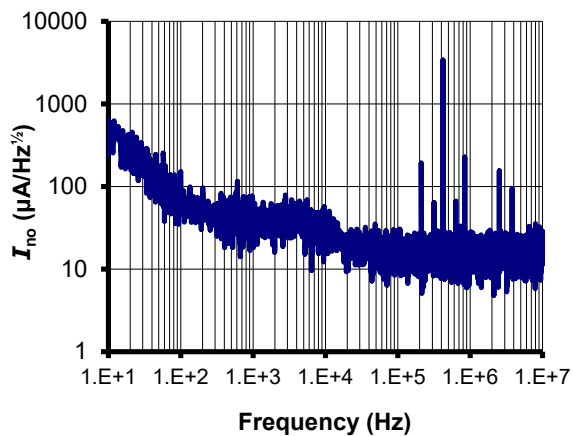


Figure 5: Input referred noise

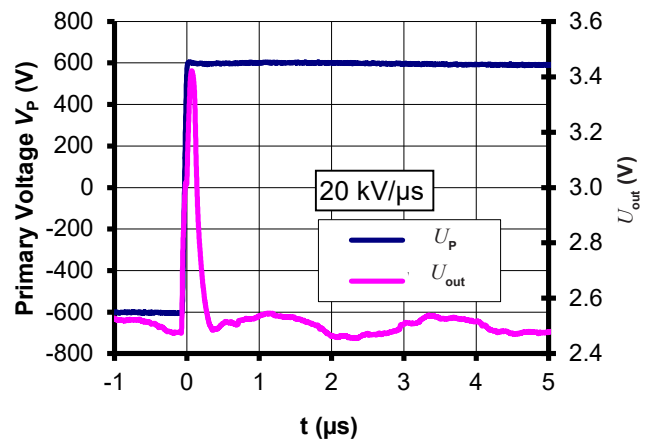


Figure 6: dv/dt

Typical performance characteristics CAS 15-NP

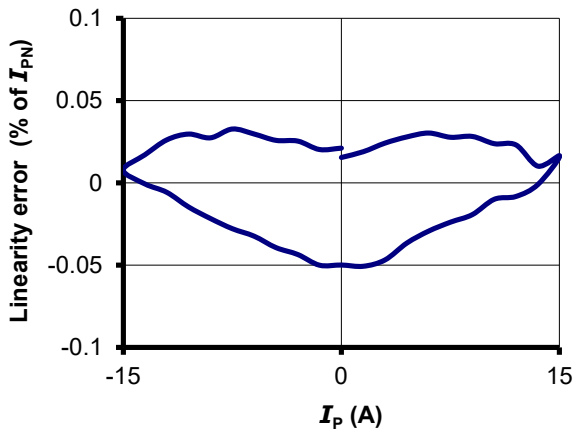


Figure 7: Linearity error

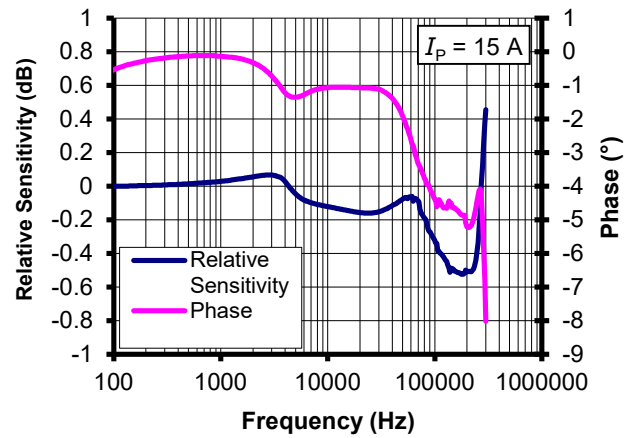


Figure 8: Frequency response

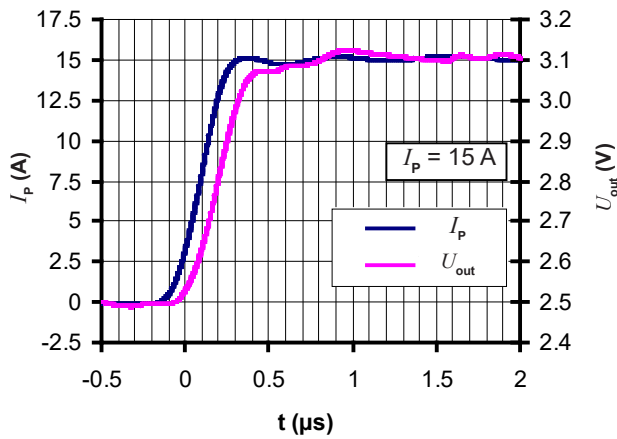


Figure 9: Step response

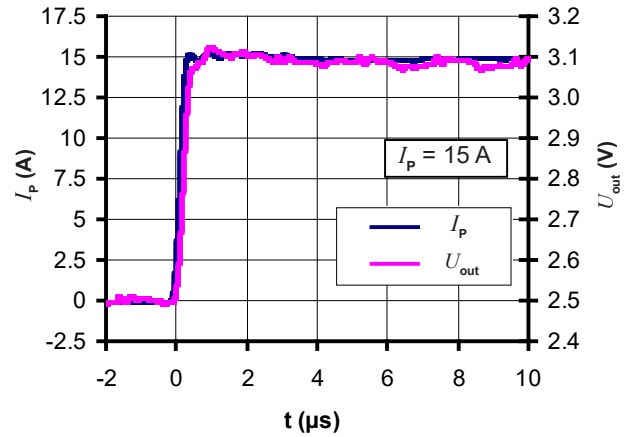


Figure 10: Step response

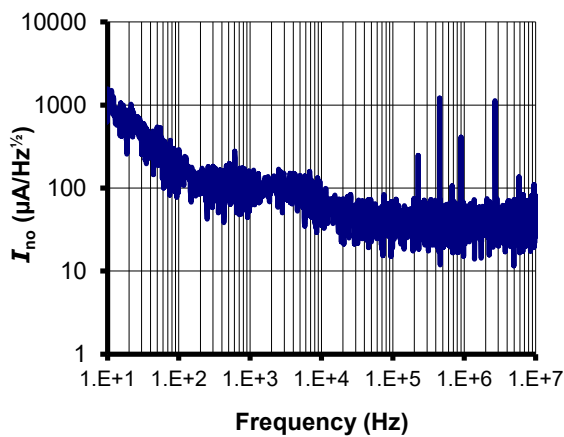


Figure 11: Input referred noise

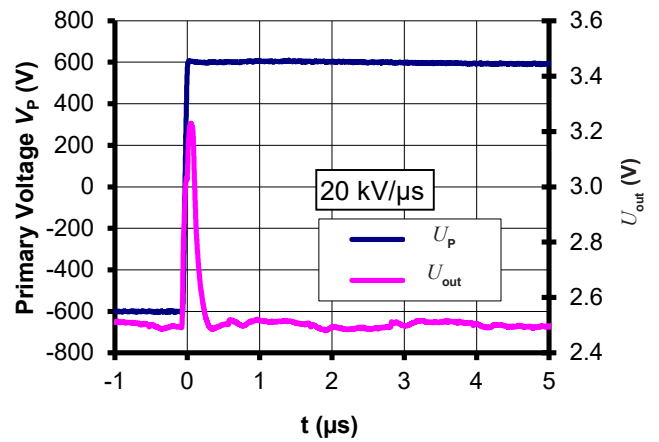


Figure 12: dv/dt

Typical performance characteristics CAS 25-NP

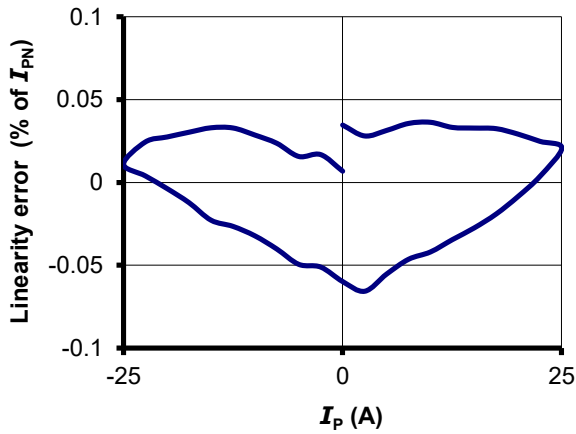


Figure 13: Linearity error

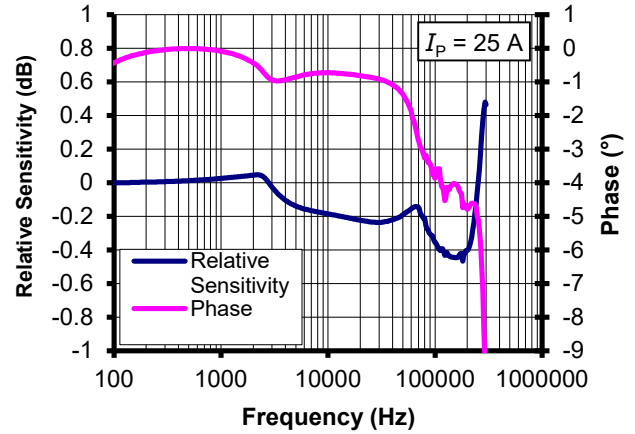


Figure 14: Frequency response

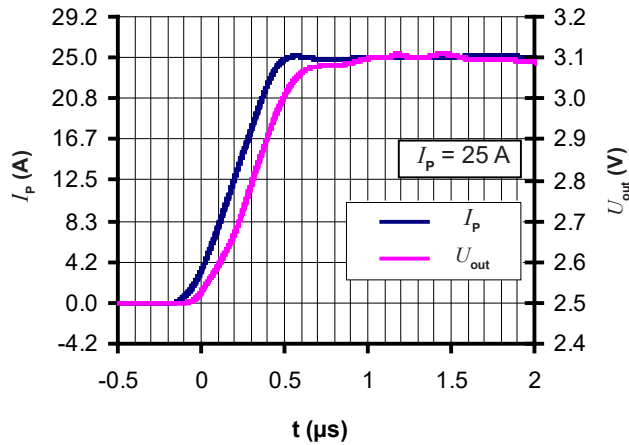


Figure 15: Step response

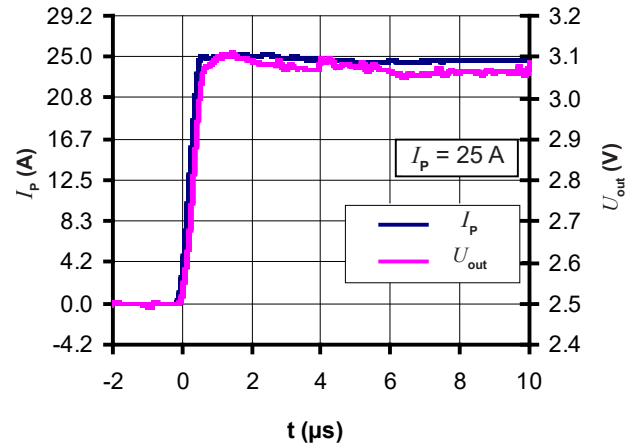


Figure 16: Step response

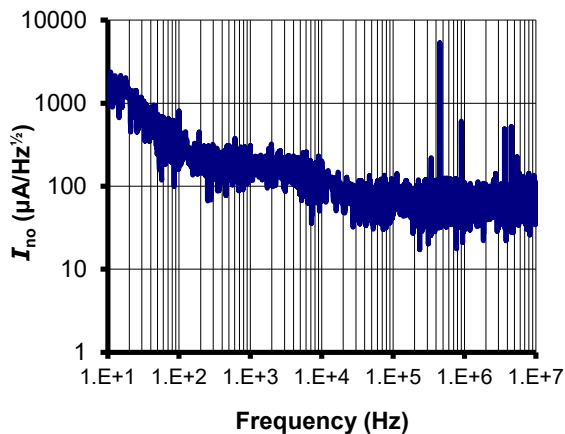


Figure 17: Input referred noise

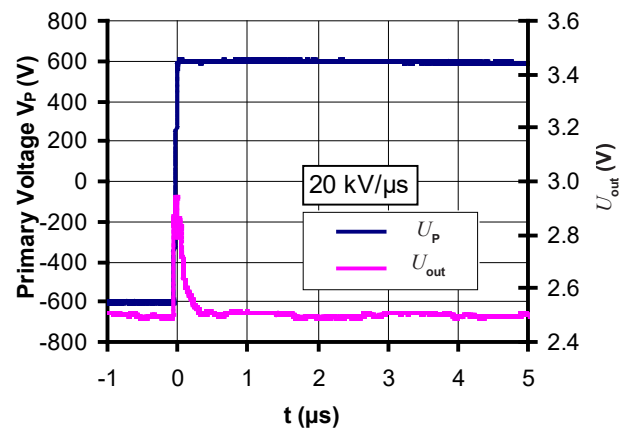


Figure 18: dv/dt

Typical performance characteristics CAS 50-NP

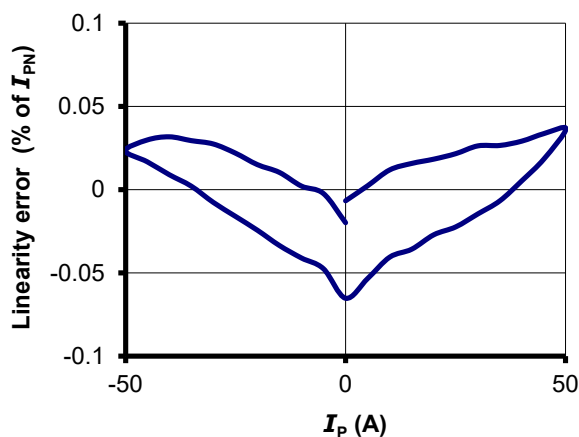


Figure 19: Linearity error

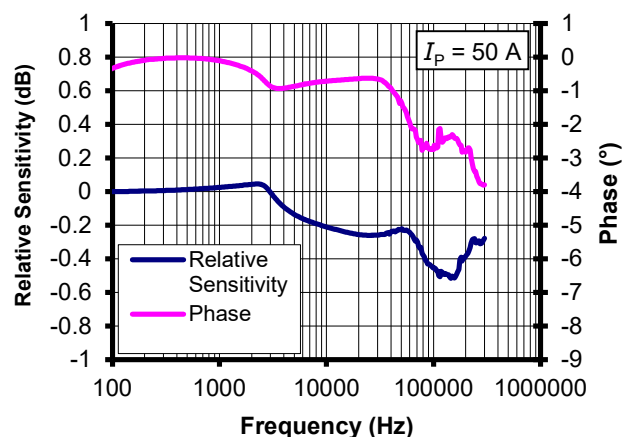


Figure 20: Frequency response

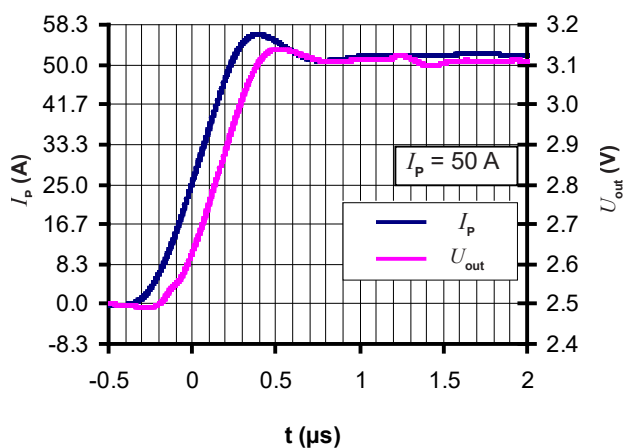


Figure 21: Step response

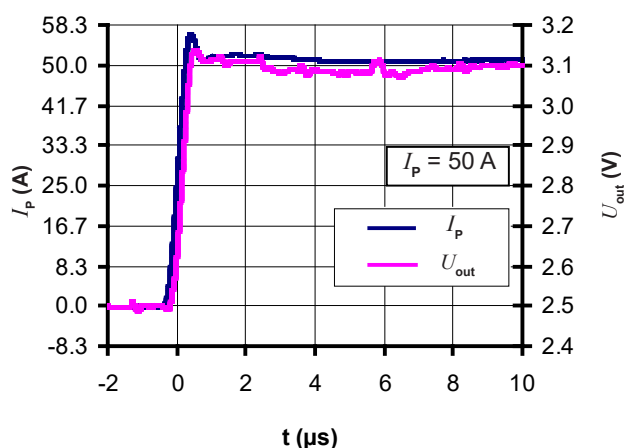


Figure 22: Step response

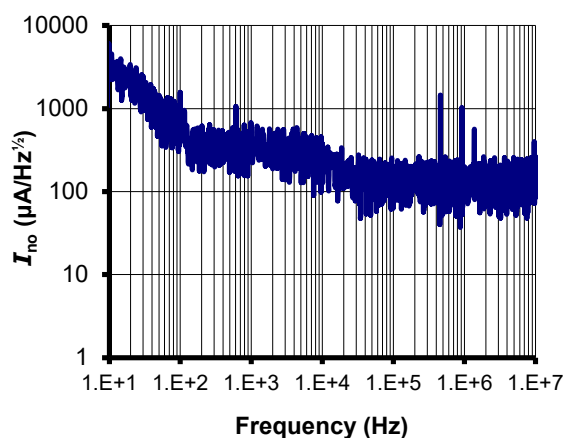


Figure 23: Input referred noise

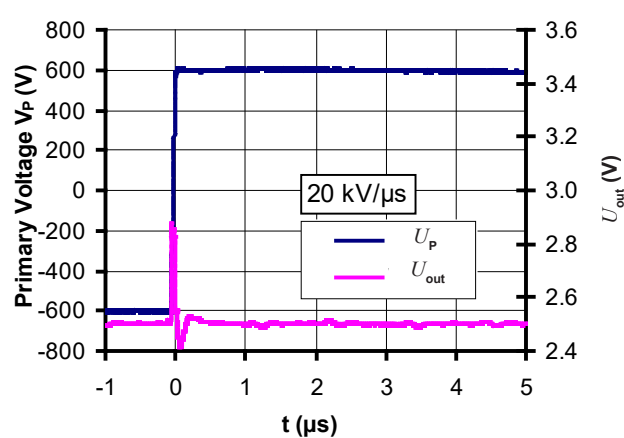


Figure 24: dv/dt

Maximum continuous DC primary current

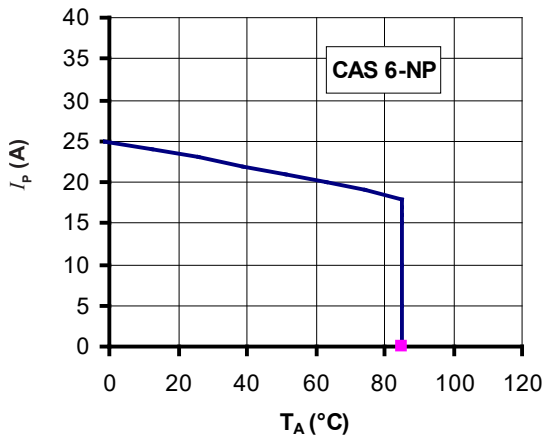


Figure 25: I_P vs T_A for CAS 6-NP

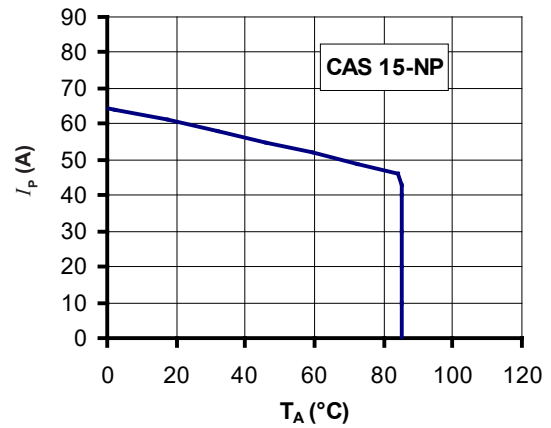


Figure 26: I_P vs T_A for CAS 15-NP

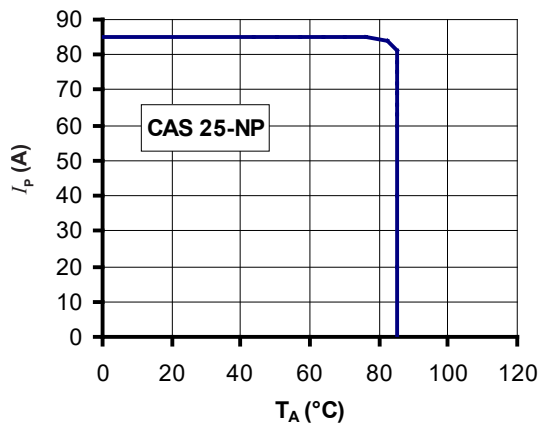


Figure 27: I_P vs T_A for CAS 25-NP

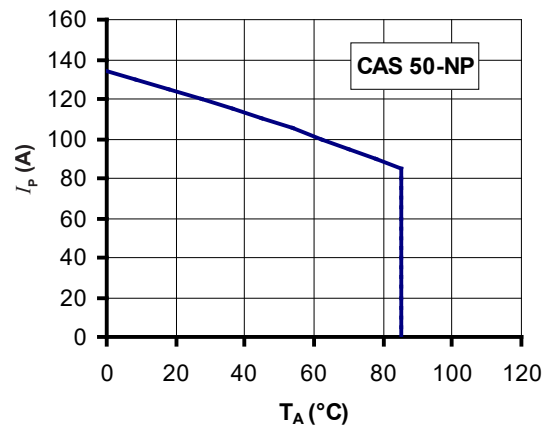


Figure 28: I_P vs T_A for CAS 50-NP

The maximum continuous DC primary current plot shows the boundary of the area for which all the following conditions are true:

- $I_P < I_{PM}$
- Junction temperature $T_j < 125\text{ °C}$
- Primary conductor temperature $< 110\text{ °C}$
- Resistor power dissipation $< 0.5 \times \text{rated power}$

Frequency derating

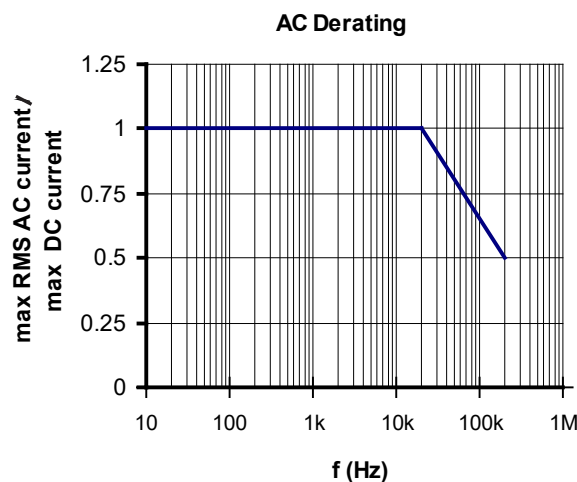


Figure 29: Maximum RMS AC primary current / maximum DC primary current vs frequency

Performance parameters definition

Ampere-turns and amperes

The transducer is sensitive to the primary current linkage Θ_p (also called ampere-turns).

$$\Theta_p = N_p I_p (\text{At})$$

Where $N_p I_p$ the number of primary turn (1, 2 or 3 depending on the connection of the primary jumpers)

Caution: As most applications will use the transducer with only one single primary turn ($N_p = 1$), much of this data-sheet is written in terms of primary current instead of current linkages. However, the ampere-turns (A-t) unit is used to emphasis that current linkages are intended and applicable.

Transducer simplified model

The static model of the transducer at temperature T_A is:

$$U_{\text{out}} = S \cdot \Theta_p + \varepsilon$$

In which $\varepsilon =$

$$U_{OE} + U_{OT}(T_A) + \varepsilon_S \cdot \Theta_p \cdot S + \varepsilon_L(\Theta_{P \max}) \cdot \Theta_{P \max} \cdot S + TCS \cdot (T_A - 25) \cdot \Theta_p \cdot S$$

With:

- $\Theta_p = N_p I_p$: primary current linkage (At)
- $\Theta_{P \max}$: max primary current linkage applied to the transducer (At)
- U_{out} : output voltage (V)
- T_A : ambient operating temperature ($^{\circ}\text{C}$)
- U_{OE} : electrical offset voltage (V)
- $U_{OT}(T_A)$: temperature variation of U_{OE} at temperature T_A ($^{\circ}\text{C}$)
- S : sensitivity of the transducer (V/At)
- ε_S : sensitivity error
- $\varepsilon_L(\Theta_{P \max})$: linearity error for $\Theta_{P \max}$

This model is valid for primary ampere-turns Θ_p between $-\Theta_{P \max}$ and $+\Theta_{P \max}$ only.

Sensitivity and linearity

To measure sensitivity and linearity, the primary current (DC) is cycled from 0 to I_p , then to $-I_p$ and back to 0 (equally spaced $I_p/10$ steps).

The sensitivity S is defined as the slope of the linear regression line for a cycle between $\pm I_{PN}$.

The linearity error ε_L is the maximum positive or negative difference between the measured points and the linear regression line, expressed in % of I_{PN} .

Magnetic offset

The magnetic offset current I_{OM} is the consequence of a current on the primary side ("memory effect" of the transducer's ferro-magnetic parts). It is included in the linearity figure but can be measured individually. It is measured using the following primary current cycle. I_{OM} depends on the current value I_{P1} .

$$I_{OM} = \frac{U_{\text{out}}(t_1) - U_{\text{out}}(t_2)}{2} \cdot \frac{1}{S_{th}}$$

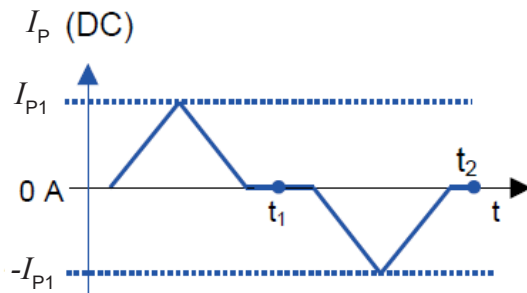


Figure 30: Current cycle used to measure magnetic and electrical offset (transducer supplied)

Performance parameters definition (continued)

Electrical offset

The electrical offset voltage U_{OE} can either be measured when the ferro-magnetic parts of the transducer are:

- completely demagnetized, which is difficult to realize,
- or in a known magnetization state, like in the current cycle shown in figure 30.

Using the current cycle shown in figure 30, the electrical offset is:

$$U_{OE} = \frac{U_{out}(t_1) + U_{out}(t_2)}{2}$$

The temperature variation U_{OT} of the electrical offset voltage U_{OE} is the variation of the electrical offset from 25°C to the considered temperature:

$$U_{OT}(T) = U_{OE}(T) - U_{OE}(25\text{ °C})$$

Note: the transducer has to be demagnetized prior to the application of the current cycle (for example with a demagnetization tunnel).

Total error

The overall accuracy at 25 °C ε_s is the error in the $-I_{PN} \dots +I_{PN}$ range, relative to the rated value I_{PN} . It includes:

- the electrical offset U_{OE}
- the sensitivity error ε_s
- the linearity error ε_s (to I_{PN})

The magnetic offset is part of the overall accuracy. It is taken into account in the linearity error figure provided the transducer has not been magnetized by a current higher than I_{PN} .

Delay time

The delay time t_{D10} @ 10 % and the delay time t_{D90} @ 90 % with respect to the primary are shown in the next figure. Both slightly depend on the primary current di/dt. They are measured at nominal current.

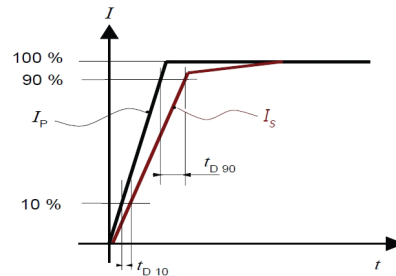


Figure 31: t_{D10} (delay time @ 10 %) and t_{D90} (delay time @ 90 %).

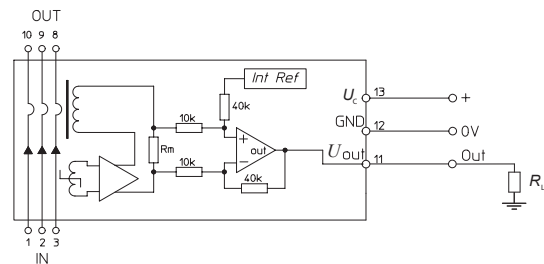


Figure 32: Test connection

Application information

Filtering and decoupling

Supply voltage U_C

The fluxgate oscillator draws current pulses of up to 30 mA at a rate of ca. 900 kHz. Significant 900 kHz voltage ripple on U_C can indicate a power supply with high impedance. At these frequencies the power supply rejection ratio is low, and the ripple may appear on the transducer output U_{out} and reference U_{ref} . The transducer has internal decoupling capacitors, but in the case of a power supply with high impedance, it is advised to provide local decoupling (100 nF or more, located close to the transducer).

Total Primary Resistance


The primary resistance is 0.72 mΩ per conductor

In the following table, examples of primary resistance according to the number of primary turns.


Number of primary turns	Primary resistance R_p [mΩ]	Recommended connections
1	0.24	
2	1.08	
3	2.16	

Output U_{out}

The output U_{out} has a very low output impedance of typically 2 Ohms; it can drive 100 pF directly. Adding series $R_f = 100$ Ohms allows much larger capacitive loads. Empirical evaluation may be necessary to obtain optimum results. The minimum load resistance on U_{out} is 1 kΩ.

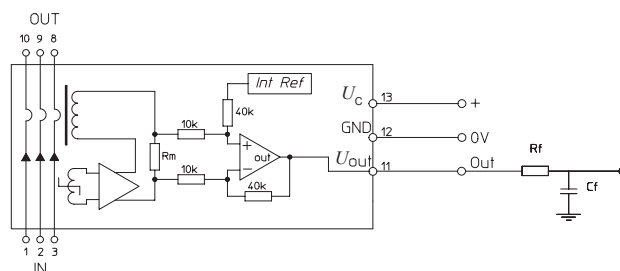

CAS Series, PCB footprint

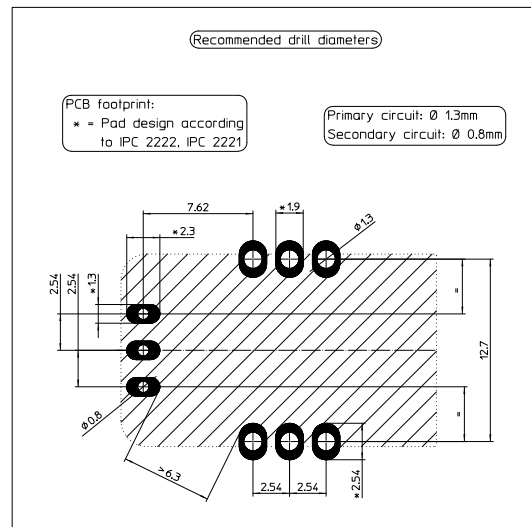





Assembly on PCB

- Recommended PCB hole diameter 1.3 mm for primary pin
0.8 mm for secondary pin
- Maximum PCB thickness 2.4 mm
- Wave soldering profile maximum 260 °C for 10 s
No clean process only

Dimensions CAS Series (in mm. General linear tolerance ± 0.25 mm)



Connection

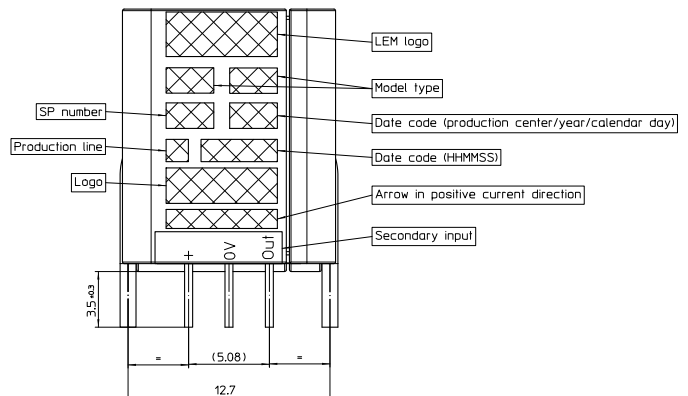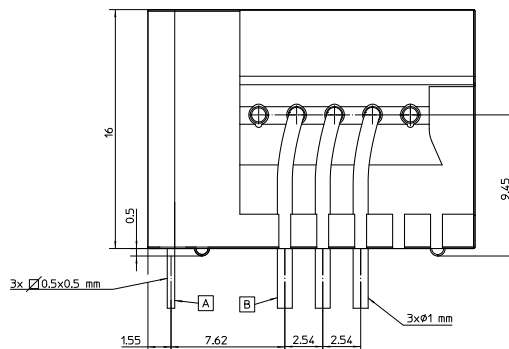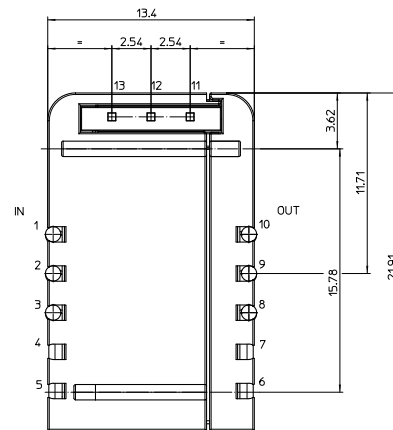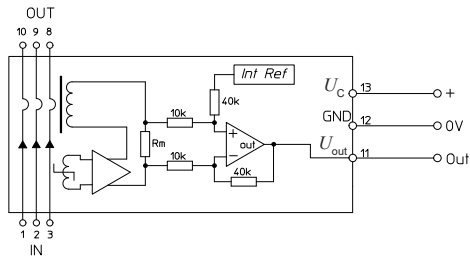

Additional marking on the TOP of the transducer, model type, current range and SP number

	Clearance	Creepage
A-B	7.7 mm*	7.7 mm

IMPORTANT NOTICE

The information in this document is considered accurate and reliable. However, LEM International SA and any company directly or indirectly controlled by LEM Holding SA ("LEM") do not provide any guarantee or warranty, expressed or implied, regarding the accuracy or completeness of this information and are not liable for any consequences resulting from its use. LEM shall not be responsible for any indirect, incidental, punitive, special, or consequential damages (including, but not limited to, lost profits, lost savings, business interruption, costs related to the removal or replacement of products, or rework charges) regardless of whether such damages arise from tort (including negligence), warranty, breach of contract, or any other legal theory.

LEM reserves the right to update the information in this document, including specifications and product descriptions, at any time without prior notice. Information in this document replaces any previous versions of this document. No license to any intellectual property is granted by LEM through this document, either explicitly or implicitly. Any Information and product described herein is subject to export control regulations.

LEM products may possess either unidentified or documented vulnerabilities. It is the sole responsibility of the purchaser to design and operate their applications and products in a manner that mitigates the impact of these vulnerabilities. LEM disclaims any liability for such vulnerabilities. Customers must select products with security features that best comply with applicable rules, regulations, and standards for their intended use. The purchaser is responsible for making final design decisions regarding its products and for ensuring compliance with all legal, regulatory, and security-related requirements, irrespective of any information or support provided by LEM.

LEM products are not intended, authorized, or warranted for use in life support, life-critical, or safety-critical systems or equipment, nor in applications where failure or malfunction of an LEM product could result in personal injury, death, or significant property or environmental damage. LEM and its suppliers do not assume liability for the inclusion and/or use of LEM products in such equipment or applications; thus, this inclusion and/or use is at the purchaser's own and sole risk. Unless explicitly stated that a specific LEM product is automotive qualified, it should not be used in automotive applications. LEM does not accept liability for the inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

Applications that are described herein are for illustrative purposes only. LEM makes no representation or warranty that LEM products will be suitable for a particular purpose, a specified use or application. The purchaser is solely responsible for the design and operation of its applications and devices using LEM products, and LEM accepts no liability for any assistance with any application or purchaser product design. It is purchaser's sole responsibility to determine whether the LEM product is suitable and fit for the purchaser's applications and products planned, as well as for the planned application and use of purchaser's third-party customer(s).

Stressing and using LEM products at or above limiting values will cause permanent damage to the LEM product and potentially to any device embedding or operating with LEM product. Limiting values are stress ratings only and operation of the LEM product at or above conditions and limits given in this document is not warranted. Continuous or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the LEM product.

LEM products are sold subject to the general terms and conditions of commercial sale, as published at www.lem.com unless otherwise agreed in a specific written agreement. LEM hereby expressly rejects the purchaser's general terms and conditions for purchasing LEM products by purchaser. Any terms and conditions contained in any document issued by the purchaser either before or after issuance of any document by LEM containing or referring to the general terms and conditions of sale are explicitly rejected and disregarded by LEM, and the document issued by the purchaser is wholly inapplicable to any sale or licensing made by LEM and is not binding in any way on LEM.

© 2025 LEM INTERNATIONAL SA – All rights reserved